

## Contents

Introduction .....	3
1. Definitions .....	3
1.1. Definition of Co-operation forms.....	3
1.1.1. CM.....	3
1.1.2. CMT.....	3
1.1.3. FP.....	3
1.2. Definitions of Samples .....	3
1.2.1. Approval Sample .....	3
1.2.2. Counter Sample.....	3
1.2.3. Production Sample .....	3
2. Compliance Guidelines .....	3
3. Fabrics and Accessories .....	4
3.1. Fabric Specific Requirements .....	4
3.1.1. Woven Fabrics.....	4
3.1.2. Knitted Fabrics.....	4
3.2. Quality Requirements for Accessories .....	5
3.3. Testing and Inspection of Fabrics and Accessories.....	5
3.3.1. Testing of Fabrics and Accessories .....	5
3.3.2. Supplier responsibilities .....	5
3.3.3. Tests and Testing Laboratories.....	5
3.3.4. Inspection of fabrics.....	6
3.3.4.1. Inspection of Fabrics at Manufacturer of Fabrics .....	6
3.3.4.2. Inspection of Fabrics at Garment Manufacturer.....	7
3.3.5. General: Accessories.....	7
3.4. Pattern management .....	7
3.5. Sample Management.....	8
3.5.1. Approval Sample .....	8
3.5.2. Counter Sample.....	8
3.5.3. Production Sample .....	8
4. Manufacturing Guidelines .....	8
4.1. Cutting Guidelines.....	9
4.2. Markers.....	10
4.3. Spreading .....	10

4.4. Bundling.....	11
4.5. Sewing.....	11
4.5.1. Sew Needle .....	11
4.6. Tech Packs and Specifications .....	12
4.7. How to Measure.....	12
4.8. Construction Details.....	12
4.8.1. Seam and Stitches.....	12
4.8.2. Construction and Sewing Details .....	13
4.8.2.1. Collar and Neckline .....	13
4.8.2.2. Waistbands, Hem, Cuffs.....	13
4.8.2.3. Closures and Fastening.....	14
4.8.2.4. Elements: Pockets, Linings .....	15
4.8.2.5. Other Instructions .....	15
4.9. Labeling and Marking.....	15
4.9.1. Purchase Order Label.....	16
4.9.2. Logos and Labels .....	16
4.9.3. Heat transfer of Logos and Pictures.....	16
4.9.4. Transponders .....	16
4.9.5. Marking Label .....	17
4.9.6. Washing Grid.....	17
5. Finishing and Packaging.....	17
5.1. Folding Instructions.....	17
5.2. Packaging Instructions.....	17
6. Quality Control.....	17
6.1. Supplier Categories in Quality Control .....	18
6.1.1. Specific Instructions for Suppliers in Category 3 .....	18
6.1.1.1. Fabric Suppliers .....	18
6.1.1.2. Garment Suppliers .....	18

## Introduction

The Volume 2 in the Quality Assurance Manual is divided in Sections. Each Lindström Group Product Category has its own Section. This Section 2.1 explains the specific instructions for Product Category: Work Wear (WWS).

This part relates to what is included and what shall be used as support and reference material during the manufacturing process to ensure that all Lindström Group standards and expectations are met.

## 1. Definitions

Below are defined the main terms used in this Quality Assurance Manual Section 2.1: Product Category: Work Wear

### 1.1. Definition of Co-operation forms

Lindström applies three different concepts of co-operation with his suppliers, CM, CMT and FP.

#### 1.1.1. CM

In co-operation concept CM (Cutting and Manufacturing) Lindström buys cutting and manufacturing service from garment supplier. Lindström provides the garments supplier with all fabrics and accessories/trims.

#### 1.1.2. CMT

In co-operation concept CMT (Cutting, Manufacturing and Trims) garment supplier purchases the accessories/trims from sources given by Lindström. Lindström provides the supplier with fabrics.

#### 1.1.3. FP

In co-operation concept FP (full package) the garment supplier purchases both fabrics and accessories from suppliers given by Lindström.

### 1.2. Definitions of Samples

#### 1.2.1. Approval Sample

The Approval Sample is manufactured by the sample manufacturer. The Approval sample is used to verify that the garment can be produced according to given instructions, Tech Pack and/or other specification. In case of customized garment the customer shall accept the Approval Sample.

#### 1.2.2. Counter Sample

The garment supplier shall produce a Counter Sample corresponding to the Approval Sample. The approved Counter sample shall be stamped and dated and it is to be used as the Reference sample in Quality Control of future deliveries.

#### 1.2.3. Production Sample

The Production Sample is taken from the running production of the garment supplier and it is used to verify that the garment is produced as agreed and in accordance with given instructions and the accepted Counter sample.

## 2. Compliance Guidelines

The material/garments shall conform to all international and national laws and regulations. Certification of products: fabric, accessories, garment, shall be done whenever required by EU or other authorities. Lindström is responsible for the certification process. The garment supplier shall provide Lindström with samples and valid data required for certification of the item at any time.

The standards for labeling on respective Lindström Group market shall be followed for

1. Fiber composition labelling
2. Country of origin labelling

### **3. Fabrics and Accessories**

This Part relates to guidelines for Lindström Group requirements in terms of quality and functionality of fabrics and accessories, including the fabric test requirements.

All suppliers should read this part and be familiar with our requirements prior to making a submission for a tender.

The part contains:

- General requirements
- Fabric-specific quality requirements
- Accessories quality requirements
- Testing requirements.

The quality of all fabrics and accessories used in Lindström garments must meet all stated Lindström quality standards. In a situation where a quality issue arises, either from customer returns or as identified by Lindström before bulk garments are delivered to our Central Warehouse or to our Business Unit, Lindström may require the Supplier to have further testing carried out. All testing is at the Supplier's expense.

#### **3.1. Fabric Specific Requirements**

At Lindström different kinds of fabric are used in garments. The fabrics are divided into two main categories, woven and knitted. The different kinds of fabrics in the two categories are divided according to their fiber composition and their weight: grams/square meter (gsm). The minimum values of the required tests for fabrics that reach Lindström quality level are shown in the Supporting material. International standards are mentioned for each required test in terms of harmful substances the fabrics shall comply with requirements of Öko-Tex Standard 100 and REACH regulations.

##### **3.1.1. Woven Fabrics**

The fabric shall be suitable for industrial wash and drying as defined in ISO 15797. ISO 30023 defines the symbols for testing suitability of work wear for industrial wash.

When selecting colors the fabric manufacturer shall give preference to PES dyed with dispersed dyestuffs and CO dyed vat dyestuffs in accordance with best practice.  
For white fabrics, optical brighteners shall maintain their properties during at least 50 washes. For white fabrics chlorine retention for color change shall be avoided.

In case of sensitive and/or critical color combinations in a garment, separate assessment is needed.

##### **3.1.2. Knitted Fabrics**

Knitted fabrics shall be suitable for industrial wash and appropriate drying process (e.g. tumbler or finisher) reference being the process mentioned in ISO 15797. Specifications of knits shall include a grading system for defects. The torsion/twisting angle shall not exceed a 5 % deviation.

Uses of a garment for specific purpose influence the requirements on the fabric. Usability of materials e.g. for fire resistant, high visible, ESD (Electrostatic Discharge) and clean room garments shall be especially tested. Lindström defines separately the needed tests case by case for these specific purposes.

Supporting Material

2.1\_3.1 Minimum values for fabrics that contain 50 % or more polyester

2.1\_3.1 Minimum values for fabrics that contain less than 50 % PES.

2.1\_3.1 Minimum values for 100 % cotton fabrics.

2.1\_3.1 Minimum values for knitted cloths

### **3.2. Quality Requirements for Accessories**

All accessories used in the garments shall meet with Lindström standards.

Lindström tests and selects new trims when a new trim is required. The source for the trims is given to the CM/CMT garment supplier, who does the purchasing of them. Lindström has the right to demand invoices on trims from the garment supplier to check that agreed trims have been purchased and used.

No other accessories than those mentioned in the Tech Pack or in any other by Lindström provided written document shall be used.

Visual approval only

Lindström approval reports will approve fabrics and accessories from a visual aspect only.

If a performance issue on an approval sample is obvious to Lindström the Supplier will be advised to amend the issue via our approval report.

### **3.3. Testing and Inspection of Fabrics and Accessories**

#### **3.3.1. Testing of Fabrics and Accessories**

The Suppliers of various materials are aware of Lindström standards and familiar with what types of tests are to be conducted for the required standards.

In CM and CMT based contracting Lindström is responsible for testing new fabrics to ensure that they meet with set requirements. In FP based contracting the supplier is responsible for testing of fabrics by an authorized testing company to ensure exact matching to Lindström requirements.

Lindström may request fabric and accessories to be tested by a third party to the performance levels stated in this document. If the fabric or the accessories do not meet Lindström standards, the supplier will be charged for testing costs and may be penalized.

#### **3.3.2. Supplier responsibilities**

It is the Supplier's responsibility to inspect and when necessary test fabrics, accessories, components and labels as stated above.

All required testing must be carried out prior to submission of the item for approval. Suppliers must submit the lab test report at the same time as the item is submitted for approval – where Lindström specifically requests testing to be done, Lindström will not approve the item if the lab test report does not accompany the sample.

The lab test report must be an original document from the testing laboratory. Photocopies or faxed copies of lab test reports are not acceptable.

#### **3.3.3. Tests and Testing Laboratories**

The selected properties of the various fabrics shall be tested according to given instructions in the supporting material mentioned below.

For all fabric tests conducted in the various countries the nominated suppliers are noted in the Supporting material mentioned below.

Supporting Material

List of Tests to be made for Various Types of Fabrics  
List of Accepted Test Laboratories

### **3.3.4. Inspection of fabrics**

Inspection of fabrics shall be carried out at two points of the supply chain. The first inspection point shall be carried out at the mill of manufacturer of the fabric. This inspection is comprehensive and shall be carried out as described in 3.3.4.1.

The second inspection of the fabric shall be carried out at the garment manufacturer to ensure that the fabric used in Lindström garments corresponds to what is written in the Tech Packs and other documentation delivered by Lindström. The garment manufacturer is responsible for this inspection as described in 3.3.4.2.

#### **3.3.4.1. Inspection of Fabrics at Manufacturer of Fabrics**

Both greige and finished fabrics shall be inspected up to 100%.

Finished fabric inspection shall be conducted using the Four Point Grading System, used by major Textile Manufacturers. Defects are assigned penalty points based on their size. Their number, related to the length of the fabric inspected, establishes the grade of fabric quality.

The system penalizes all defects which cause reject garments under specified visual observation encompassing, inspection speed, lighting and viewing position.

Defects in both warp and weft directions are assigned penalty points by the following scale:

1 point minor defect	-	for defects up to 7.5 cm.
2 point minor defect	-	for defects 7.5 1 cm to 15cm
3 point major defect	-	for defects 15.1 cm to 22.5 cm
4 point major defect	-	for defects over 22.5 cm

The acceptable level of First Quality in goods is following:

	Points per 100 linear meters	Points per 100 square meters
Maximum / Piece	40	26

Repeating major defects over two meters in cloth length should be removed from fabric during inspection. Repeating minor defects numbering more than 25 per 100 linear meters are not allowed in First Quality fabric.

Goods exceeding this standard are classified Second Quality.

The fabric shall be inspected on the face side. Inspection machines are run with a tension control system, thus avoiding any tension variance and measurement discrepancies between actual roll length and ticketed length.

The shade of the fabric shall match with the approved original stamped sample. Inspection measuring machines shall be controlled weekly using a standard calibrated master roll. Fabric roll information tickets shall be attached on each roll of fabric. The inspected by - number indicates the specific fabric inspector examining the roll.

The inspection report shall be submitted to Lindström immediately after the inspection has been completed and always prior the dispatch to given delivery address.  
Unless otherwise agreed, no Second Quality goods are accepted.

### **3.3.4.2. Inspection of Fabrics at Garment Manufacturer**

The garment manufacturer shall carry out a quality control for received fabrics rolls as described in Volume 1 of this manual, section 5: Inspection to AQL standard.

The garment supplier shall whenever possible inspect the delivered batch of fabric on a light board.

In the Quality Inspection special attention shall be paid to:

- Holes
- Shade
- Mis-weave
- Cuts
- Yarn distortions

The shade of the fabric shall be compared with the sample of the original fabric supplied by Lindström to the garment supplier. The original fabric sample shall be stored in a dark and dry place easily available for shade control of arrived fabrics.

### **3.3.5. General: Accessories**

Trims used in Lindström garments are e.g.: sewing threads, labels, decorations, narrow fabric trims, support fabrics, insulation fabrics, zippers, buttons, snap buttons, and velcros.

#### **Inspection of Accessories**

A check list for inspecting trims at receipt:

1	Checking trim type
2	Checking correctness of color
3	Checking correctness of quantity
4	Checking overall appearance

The garment supplier shall store the trims in a clean and dry place. Stock shall be run according to the principle of first in, first out (FIFO).

### **3.4. Pattern management**

The pattern making is conducted and provided by Lindström or his partners and subcontractors.

The pattern information is delivered as electronic pattern data. Electronic pattern data is delivered in most general file formats by e-mail or web services. On demand pattern data can be delivered printed on paper or cardboard in accordance with electronic pattern data. Paper patterns are printed on glued or unglued paper.

Data on electronic pattern files or information on paper patterns shall be strictly followed by the Garment Supplier.

Garment Supplier is obliged to inform Lindström and his designated Regional Pattern Supplier of any deviation or defect revealed on pattern information. Correcting or amending of the pattern is essential before starting the production.

The patterns are the intellectual property of Lindström and they shall not be used for any other purpose than what has been agreed upon in the Contract between the garment manufacturer and Lindström.

The soft copies shall be stored in a secured database with a back-up system in order to secure availability in failure in IT systems. The paper patterns shall be stored in a safe and dry place at the garment manufacturer. Lindström patterns shall be kept separate from patterns from other customers of garment manufacturer.

### **3.5. Sample Management**

The samples needed for quality assurance as they are defined in paragraph 1.2 shall be managed as described in this paragraph. Handling of all sample types are described in detail in respective documents of PDT and MST.

#### Supporting Material

3.5 WWS Supporting Material: 3.5 Inspection List of Sample

#### **3.5.1. Approval Sample**

The Approval Samples shall be test washed to verify that all materials used in it fulfill the Lindström standards. Minimum 3 pcs shall be produced of the Approval Sample. When approved the original Approval Sample shall remain at PDT (standard collection and platform originals) or by MST in region (customized collection based on platforms). The Approval Sample shall be properly labeled and dated in respective location.

One sample is given to the sales organization for approval by the customer.

The Approval Samples shall be stored as long as the garment is in circulation.

#### **3.5.2. Counter Sample**

Minimum 3 pcs shall be produced of the Counter Sample. One of the approved, stamped and dated Counter Samples shall remain at PDT (standard collection and platform originals) or by MST in region (customized collection based on platforms). One of the stamped Counter Samples shall remain at the garment supplier and one at the person responsible for quality assurance in the region.

The Counter Samples shall be stored as long as the garment is in circulation.

#### **3.5.3. Production Sample**

Production sample shall be taken randomly from ongoing production to verify that given sample and instructions are followed. The production sample can be taken in quality control during production (DUPRO). Verification of the production sample shall be done by the Quality Control. PDT and MST in region shall be informed about taken Production Sample and the results of the verification.

## **4. Manufacturing Guidelines**

This Part relates to Lindström requirements in terms of workmanship and construction of garments, and the safety issues associated with their functionality and their manufacture.

All suppliers should read this part and be familiar with our requirements prior to making a submission for a tender.

Lindström provides the garment supplier with a Tech Pack and products pattern files.

Tech Pack includes garment's specification: style (design), bill of materials and accessories (BOM), table of measurements and information of design and construction details and sewing instructions (Cross Sections). Measurements given in the specifications shall be strictly followed. Points of measurements are defined on Measurement POM Library Report –document that will be delivered to the Garment Supplier.

See 4.3. How to Measure



Tech pack may be updated with comments or other information of modifications of fabric, trims, sewing/installation and construction details pattern. Garment supplier can be provided with Approval Sample. The garment supplier must follow all given instructions.

Counter sample from the garment supplier shall be approved by Lindström before starting production.

The garment supplier shall notify Lindstrom of every intended technical change during sampling or before the production of the products and this notification shall be sent as early as possible. A written approval for such a change is a must from Lindstrom.


Certified protective work wear complying standards have more detailed requirements and they must be strictly followed. Specifications include information from CE-labels and pictograms, User manuals, Washing grids and other elements, which are not used in standard work wear and rental work wear. Detailed instructions for certified protective work wear are given in style respective Tech Pack and product pattern files.

#### The part contains:

- Cutting guidelines
- Markers
- Spreading
- Bundling
- Sewing
- Tech Packs and Specifications
- How to Measure Instructions
- Construction details
- Labels and Markings

### 4.1. Cutting Guidelines

Lindström calculates the target consumption for fabric for each garment style separately to secure efficient consumption of fabric. The chart clarifies the consequences of reaching a fabric consumption target when CM or CMT sourcing is used and Lindström is financially responsible for the fabric.

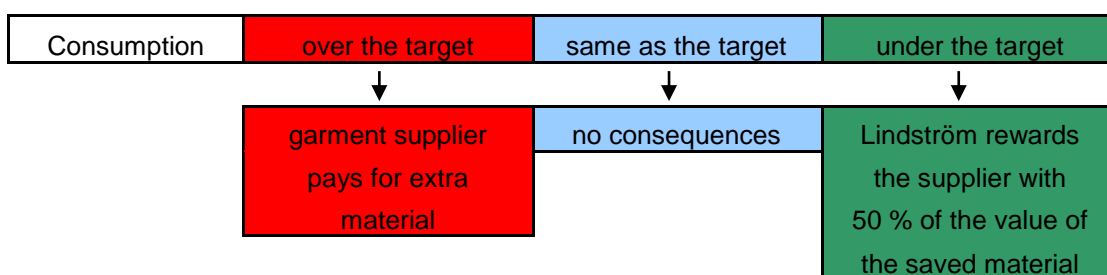

#### *Consequences of reaching to fabric consumption target in CM and CMT sourcing.*


If the garment supplier buys the fabrics for the garments – the full package concept is employed – material costs are highly affected by cut planning.

Cut planning shall be made for three different fabric widths. The standard width of a fabric is 150 cm, which requires a cut plan that is 148 cm wide, since 1 cm extra space on both edges must be given to prevent faulty cut pieces.

There are fabric rolls that are narrower or wider than standard. The widths can be, e.g. 148 cm, 150 cm or 152 cm. Therefore, cutting plans for narrower and wider rolls must be made. Since the width of fabric rolls is

measured and sorted on arrival, cut planning shall be informed about the actual width of the rolls. Cut plans are made according to this information.

Fabric width measuring and the length of the fabric in rolls are checked from roll tickets on arrival in the garment factory. Fabric rolls needed for markers shall be chosen from stock so that whole rolls are used as much as possible. Change of fabric rolls create costs because often the garment pieces cut from the change point are defective. The defects can be partially prevented by cut plans that enable roll changes. With a proper cut plan fabric pieces of different shades can be separated. An example of a cut plan that enables changing a fabric roll can be viewed in figure below.

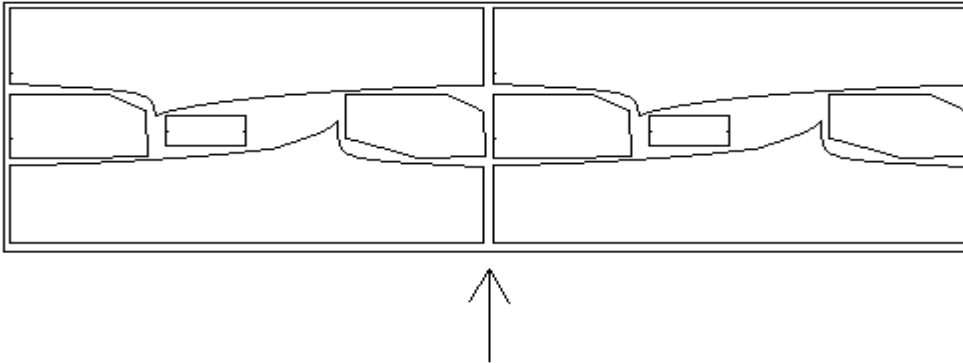

*Example for a cut plan enabling fabric roll change in the middle of a fabric layer*

By proper cutting plans lots of fabric can be saved. Information about defects on fabric can be transferred to a computerized cut planning system where patterns easily can be moved or reorganized.

Cutting devices shall be sharp and well maintained to ensure clean, unburned and unfused edges. Cutting shall be efficient and precise. Computerized cutting equipment is fast, accurate, and when they are employed, mistakes rarely happen. After cutting, required markings are made to fabric pieces by notchers, drills and tread markers.

## **4.2. Markers**

Cutting plans are either drawn onto a marker-paper by an automatic plotter or transferred to a computerized cutting device. If computerized cutting equipment is used, actual drawn markers are not needed because the cutting device cuts directly according to a cutting plan. Paper markers can be copied to cut similar cutting plans in the future. Copying consumes large amounts of paper. Computerized cutting is more cost effective than copying due to less paper consumption especially when a large number of markers are needed.

## **4.3. Spreading**

Spreading of fabric shall be done in two stages. In the first stage a quality check shall be done to the fabric. Fabric rolls to be spread are chosen – in addition to the type and color of fabric – according to the width, length and batch, which is given on the roll information ticket of the fabric manufacturer. The width and length of fabrics shall be measured to secure that information given by the fabric manufacturer is correct.

If light table inspection of the incoming fabric has been carried out as described in 3.3.4.2 in the quality check at spreading the width and length of the fabric shall be measured. If at spreading holes, shading and mis-weaves, cuts and yarn distortions are still discovered instructions below shall be followed.

The defects shall be marked at the edge of the fabric with colored tapes or stickers. A piece of fabric with a small defect can be replaced after cutting, but a large defect may require cutting some fabric away. e.g., a colored paper can be placed on top of defective fabric section. After cutting the defective garment piece can be easily located and replaced.


#### Required actions at fabric examination

Sufficient accuracy of quality check is: if the defect can be visually seen by a person that has good eyesight, a defect in quality exists. The garment supplier must take care that the pieces of fabrics with quality failures do not enter as garments.

The second stage of spreading is the actual spreading of the fabric. The fabric shall be spread accurately and without tension onto the cutting table according to the length of the marker. Correct ply tension is especially important for knit fabrics. Spreading equipment can be used to assist spreading fabric faster than by doing it manually. Direction of fabric may differ depending on the patterns, equipment and fabric type. A garment that contains symmetrical pieces can be cut either fabric spread face to face or all plies in the same direction, and asymmetrical pieces from a lay that contains only lays in one direction.

### 4.4. Bundling

Fabric pieces are bundled into stacks, which contain similar pieces of the same style and size. Sewing operators have to pick the fabric pieces systematically from the top or bottom of the stacks, because there might be different colors and different shades of colors in the lay. If there are different shades of the same color in the stack, the plies have to be numbered with pressure-sensitive tickets. The tickets also reveal the right side of the fabric if it is difficult to recognize. An example of a fabric piece stack that has been marked with number tickets can be seen in figure below.

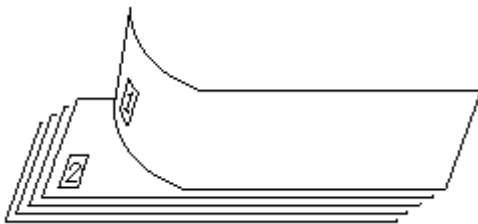

*Fabric piece stack with number ticket on each ply*

A style number, size and part identification shall be marked on the bundle, e.g., on the top ply. The marking can be on the pattern paper or it can be written on an adhesive label that is attached to the top ply.

If a garment piece is to be replaced in the bundle, the replacing piece shall be put into the same position. The order of the garment pieces in the bundle does not change and correct colors and color shades are in the similar position.

### 4.5. Sewing

The construction and manufacturing of garments shall follow what is described in Tech Pack and other by Lindström provided material. The supervisor of the sewing department shall provide the operators with proper sewing instructions before production starts. The supervisor shall be responsible for that the instructions are understood and followed by doing checks during sewing.

Before sewing, support fabrics are attached to the correct fabric pieces to correct locations. The fabric pieces that require support fabric must be marked in the instructions. Additionally, the correct locations for the support fabric on the fabric pieces shall be marked.

Garment Supplier shall pay special attention to that deviations in the sewing quality are minimized by using right type of machines for making the different details in the garment.

#### 4.5.1. Sew Needle

Care shall be used when selecting needle and point size/type to avoid damage to fabric/accessories and needle. The selected needles shall be compatible with the thread. For fabrics gsm <150 need number 14/90 or lower shall be used. For fabrics gsm 150> needle number 16/100 shall be used.

Garment Supplier is responsible for ensuring that the customer's safety is not compromised in any way by the finished state of the Work Wear. This objective must be actioned through quality inspection procedures and line supervision during the manufacturing processes. It also entails compliance with the standards, regulations and Acts listed under Compliance in the Quality Assurance section, Volume 1 of this manual.

Garment Supplier is responsible for that no parts of a broken needle are left in the garment being sewn. If necessary the garments shall be passed through a metal detector.

#### **4.6. Tech Packs and Specifications**

The Tech Pack and other specifications for each contracted item are delivered to the Garment Supplier and to the Quality Controlling body, internal or external.

The instructions given on the documentation shall strictly be followed. For any contradiction or error in or between the documents shall without any delay be reported to Lindström.

Supporting materials: 4.6 Tech Pack Template

#### **4.7. How to Measure**

The measurements shall be taken in the correct position and correct way, as well as accurately.

The exact measurements for the garment in question shall always be checked on measurement table resp. Tech Pack.

Instructions for measuring of the garment are guided on Measurement POM Library Report –document that will be delivered to the Garment Supplier.

Supporting materials: 4.7 Measuring Instructions

#### **4.8. Construction Details**

This part gives guidelines for seam quality and workmanship and describes the details of the of the construction details of the garment.

Garment must be made according to Tech Pack instructions. Tech Packs construction details show general construction information of closures and elements. Style related instruction of stitching is given in Tech Pack in detailed black and white sketch.

##### **4.8.1. Seam and Stitches**

The seam and stitch type in garments shall follow Lindstrom's sewing instructions and samples. Detailed information of instructions for seams is in Tech Pack Sewing instruction and sewing detail.

Stiches must not be broken and skipped stiches must not occur.

Stitch formation shall be correctly balanced and tensioned to prevent seams from distortion, grinning or puckering. Seams shall not crack under tension and therefore, stitching shall have extension properties compatible with the fabric. The minimum of Stitch density shall be 3,5stiches per 1 cm or following Lindstrom instructions. In general, a centimeter of seam allowance shall be allowed on all seams. Exception to seam allowances is noted in Tech Pack and pattern files.

A 3 cm overlapping of threads shall be ensured when thread is broken.

Seam slippage must not occur. All plies shall be fully included and fabrics must lie flat within the bight of the seam, unless specifically required otherwise.

Following stich types are used in Tech Pack and specifications:

### **Lock stitch**

Stitch formation and stitch tensions shall be correctly balanced to provide a stable seam with adequate extensibility, and to prevent buckler or seam grinning. Ends of stitching shall be securely back tacked to prevent unraveling.

Example of a special seam and stitch type combination used in trousers' front rise seam:  
3-thread lock stitch seam is sewn with a double top stitching of 2-3 mm distance.

### **Over lock**

4 thread (knitwear) or 5 thread (fabric) over lock shall be used according to Lindstrom instructions. Normally, a minimum bight of 0.8cm shall be used and it shall neaten the visible raw edge to eliminate the fraying to great extent. It is important to ensure the blade is replaced regularly to guarantee a clean cut edge.

### **Chain stitch**

Double thread chain stitch shall be used. It is important to ensure ends are adequately.

### **Top stitching**

Top stitching is instructed as a 1-needle or 2-needle stitching.  
Top stitching shall always be neat and uniform. Stitch joins on the front of garments are not acceptable and shall be avoided in other areas wherever possible. All top stitching shall be secured against unraveling.

### **Other seams**

To be updated later

## **4.8.2. Construction and Sewing Details**

### **4.8.2.1. Collar and Neckline**

#### **Collar**

The collars shall be symmetrically positioned and they shall have even, flat points. The fold line of collars shall be smooth and free from wrinkling. The lead edge of a collar shall be equal in length when fastened and not overlap.

Necklines shall never be puckered or stretched after collar attachment. Fraying or visible edges of seam allowances shall not occur when attaching collar to bodice.

#### **Neck finishes**

Necklines shall be symmetrical in shape. They shall not be stretched or distorted.

### **4.8.2.2. Waistbands, Hem, Cuffs**

#### **Waistband**

Waistband shall be flat and of consistent width. If a zip extends through the waistband, special care shall be taken to ensure that the seams do not interfere with the functioning of the zip. If an elastic waistband is used, full extension and fully recovery of the waistband shall be allowed.

## **Sleeve ends and hems**

Construction details in sleeve ends and hem are to be followed. Seam allowances must not twist or pucker.

## **Ribbed cuffs**

Separate cuffs shall be attached straight to the sleeve. Measures for rib cuff are given in Tech Pack. The closing seam shall follow the wale of the rib. Double rib cuffs shall be lock stitched closed and attached in a circle. The stitch and tensions shall be so that the rib is stretch to accommodate the hand.

## **Elasticated cuffs**

To be defined later

### **4.8.2.3. Closures and Fastening**

#### **Placket and fly**

After attachment, the finished placket shall always lie flat, must be free from pucker and roping and shall be of a consistent width. When fastened, the top placket shall cover the under placket. Ends of plackets shall be squarely positioned and any notches at the base of the stand shall be enclosed.

#### **Button with holes, button hole**

Button type and button hole shall be checked and matched. Button and button hole must be aligned correctly.

Buttons shall be securely attached. Button shall be stitched with a minimum of 12 stitches. Small cut of enforcement fabric on the inside back shall be used for the area of one layer fabric. Sufficient thread shank shall be used to enable the garments to fasten with ease.

Button hole shall be stitched securely and neatly, with full uniform edge cover without damage or distortion to the fabric. Button hole must be sized and cut correctly.

#### **Press buttons (fasteners)**

Press buttons shall be securely attached to the garment and long lasting. They shall not be applied to a single layer of fabric and an additional layer is generally required in the one layer area.

Press buttons are to be fastened accurately according to instructions of position and spacing.

Press buttons on zippers closures must not be placed on zipper.

Buttons positioning (marking) shall be done correctly and shall not be visible on finished garments.

Manual attaching machines shall never be used to attach fasteners as security is inconsistent. Either semi- or fully automatic machinery shall be used. They shall never be attached across seams of uneven thickness.

Correct tools shall be used. They shall be regularly checked to be sure in good conditions (pressure, distance). The tools shall be replaced at regular intervals to ensure the deformed or worn-out one is not used anymore.

It shall be impossible to rotate or move the fabric around a post or prong fastener.

The cap, post or prong shall be without any deformation.

The back of all post attachments shall be flat. A rounded appearance indicates insufficient clenching pressure.

The fabric shall be firmly clamped so that it is impossible to insert a thin object such as a fingernail, between fabric and fastener.

According to Pull Test the value for press buttons shall reach 90N/10s.

## **Zipper**

Zips shall be from an approved supplier and comply with the specifications. The following shall be avoided: any incomplete function, too loose or tight of sewing, the pucker or uneven or unstraight zipper. The base of zip openings shall be securely back tacked at the end of the seam to take the strain during dressing.

### **Braces**

Braces used in bib and braces are to be sewn according to instructions.

In ready garment brace shall be detached correctly to bib.

## **4.8.2.4. Elements: Pockets, Linings**

### **Pockets and flaps**

Paired pockets shall be symmetrically placed and equidistant from the center front and back of the garment. Marking shall not be visible on finished garments. Both ends of the pocket mouth shall be securely reinforced with bar tack or back tacked (following specifications). All pocket corners shall be free from pucker and distortion, and all raw edges and cuts at corners shall be fully enclosed. Pocket flaps shall be flat and size big enough to cover the pocket opening. Pockets in seams: they shall not distort the hemline and openings shall lie flat in wear.

### **Interlining**

Interlining shall be fused and pressed with face fabric by following exactly the instruction of temperature, pressure and contact time and other info from supplier to avoid any de-lamination in wash and garment use. Interlining shall be evenly used and prevented from deformation or puckering.

### **Linings, quilted linings**

Linings shall not be visible and shall not distort the garment or restrict the movement of the wearer. Construction details and sewing details must be followed.

## **4.8.2.5. Other Instructions**

### **Garment shaping**

Such as darts, tucks, gathering and pleats, etc., shall be in line with the sewing detail instruction.

### **Facings**

Facings shall always be cut on the same grain as the outer fabric in order to avoid garment distortion. They shall be flat and not be visible on the outside of the garment, unless otherwise required as a design feature. All raw edges of facings shall be over locked neatly. Waist, neck or armhole facings shall be cut to a sufficient depth to obtain a clean finish and should not roll to the outside.

## **4.9. Labeling and Marking**

### **Sew-in labels**

All labels are manufactured by approved suppliers and partners.

All labels must be securely sewn so they remain permanently attached to the garment. Labels must be attached so that none of the wording is concealed in the seams.



Each piece garment must have fiber composition and country of origin on its labels.

### **Country of Origin**

For all Lindström garment orders Country of Origin must be on a separate sew-in label sewn directly alongside the Lindström label and positioned as stated in the Tech Pack for respective garment. The language on the label shall be English.

### **Fiber Composition**

The Supplier must list the correct fiber composition on their specification. The composition shall be given using internationally known abbreviations, e.g. CO, PES, etc.

Supporting Material                      Instructions for Country of Origin and Fiber Composition Labels N/A

#### **4.9.1.                      Purchase Order Label**

Purchase order label shall be attached to each product in a visible position for easy checking when the product is folded in stock. Tracking of an order lot can easily be made from the label in the laundries when necessary.

Supporting Material                      4.9.1 172 Purchase Order-label position

#### **4.9.2.                      Logos and Labels**

##### **Lindström brand labels**

Lindström brand labels, seam label and hanger loop label are woven and pre-folded. They are sewn according to Tech Pack. Placement of the label varies according to product type.

##### **Woven label for size and product number in knitted garments**

To be updated later

##### **Customized labels**

Customized logos and labels are either sewn in labels, printed logo labels or embroidered logos. Sewn in labels can be woven or embroidered logo labels.

Customer logo can also be embroidered directly to garment in some products, like t-shirts and chef's jackets.

Customer logo or picture can be printed to knitted garments with screen print or heat transfer. Print result must not be cracking, print should not be unclear, soiled or colors mismatching.

All customized logos and logo labels are instructed with separate instructions.

#### **4.9.3.                      Heat transfer of Logos and Pictures**

To be defined later

#### **4.9.4.                      Transponders**

Transponders are attached for tracking garments in the laundry during service and washing cycle.

Using transponders in garments is noted in Tech Pack (Bill of material and sewing instructions). Placement and structure of transponders can vary according to product type, and is also informed in Tech Pack.



#### **4.9.5. Marking Label**

Marking label is a piece of fabric with printed or stamped information of garments size and product code. Marking piece is made from fabric's reverse side up. Size, shape, placement and attaching structure of the marking label is instructed in the Tech Pack.

Color of the marking/stamp is white for dark colors and black for white and light colors. Ink of the stamp must be suitable for textiles and industrial washing. Stamp must not stain garment or leap in heat contact.

Font type and size used shall be clear and approved by Lindström.

#### **4.9.6. Washing Grid**

Washing grid is a specially sized marking label with a pre-printed grid for counting washing cycles, and it is mainly used in Protective wear. Attaching grid to standard work wear is always instructed in Tech Pack.

Color of the marking/stamp is white for dark colors and black for white and light colors. Ink of the stamp must be suitable for textiles and industrial washing. Stamp must not stain garment or leap in heat contact.

Font type and size used shall be clear and approved by Lindström.

### **5. Finishing and Packaging**

The finished garments shall be clean, dry and neat, free from any soiling and odor. Dirt or any mark shall be removed. All thread ends shall be trimmed and removed. No any objects attached or inside the garments, such as safety pins, scissors, needles or needle parts, pins, pens, button or machine parts, tools, loose accessories, etc. are allowed.

#### **5.1. Folding Instructions**

Garments must be folded to avoid creasing.

Coats, shirts, jackets and overalls are folded by using a folding plate.

Dungarees, trousers, winter coats, bermudas, waistcoats, terry towels and aprons are folded without the folding plate.

Folding is performed according to the product-specific instructions.

The folding plate is installed fixed. The front edge of the plate is ca 4 cm above from the table's surface.

Supporting Materials: 5.1 Folding instructions

#### **5.2. Packaging Instructions**

This part relates to the requirements for packing of the bulk ready for shipment.

Garments are to be packed in one inner poly wrapper per carton. The poly wrapper must be sealed.

Garments must NOT be packed in individual polybags.

Garments must be dry before being packed

Supporting Materials: 5.2 Packaging instructions for garments

### **6. Quality Control**

The supplier shall follow the instructions given by Lindström in this Quality Assurance Manual when producing garments. The supplier shall have an internal quality assurance system for quality control on line.

Quality control shall be done, without any exception, for all incoming fabrics and accessories, for garmenting during the production and for the finished garments.

Lindström or by him nominated external representative carries out quality control during production or for finished garments according to what is described below in paragraph 6.1.

The quality control shall in first hand be done by comparing the labeled counter/reference sample to samples from production. The documented manufacturing instructions provided by Lindström shall be turned to if some deviations are found. The provided documents shall be valid in following sequence:

- Pattern
- Tech Pack
- Other instructions

## **6.1. Supplier Categories in Quality Control**

The Suppliers are classified in three main categories according to the need of level of quality control for their products. The classification is based on their status in the Lindström Group supplier base and the product categories they supply to Lindström Group as follows:

Well-established regional supplier

- a. Long business relationship with Lindström Group
- b. products of established standard quality on Lindström Group or supplier specification

Need of quality control: Random FRI

2. Well-established global supplier

- a. Long business relationship with Lindström Group
- b. Products manufactured on Lindström Group specification

Need of quality control: Random FRI

3. Supplier in introductory phase or production under special observation

- a. New supplier in starting phase
- b. Existing supplier manufacturing a new product on given specification

Need of Quality control: DUPRO and FRI. Accuracy to be decided case by case

### **6.1.1. Specific Instructions for Suppliers in Category 3**

#### **6.1.1.1. Fabric Suppliers**

Each delivery lot from a fabric supplier in Category 3 shall be tested as mentioned in paragraph 3.3.3. Tests and Testing laboratories and in Supporting Material of that paragraph.

#### **6.1.1.2. Garment Suppliers**

Each delivery lot from a Garment Supplier in Category 3 shall be Quality Controlled as follows:

- During Production Inspection DUPRO:  
shall be conducted for new styles if the ordered quantity is 500</style  
shall be conducted for existing style if ordered quantity is 3200</Style

Random DUPRO can also be made for any style if ordered quantity is <500

- Final Random Inspection FRI:  
Shall be conducted if the ordered quantity for any style is 500<

Supporting Material 2.1\_6 Defect List WWS